


geratech[®]



EGE-P-300VD

VGA to DVI-D Scaler

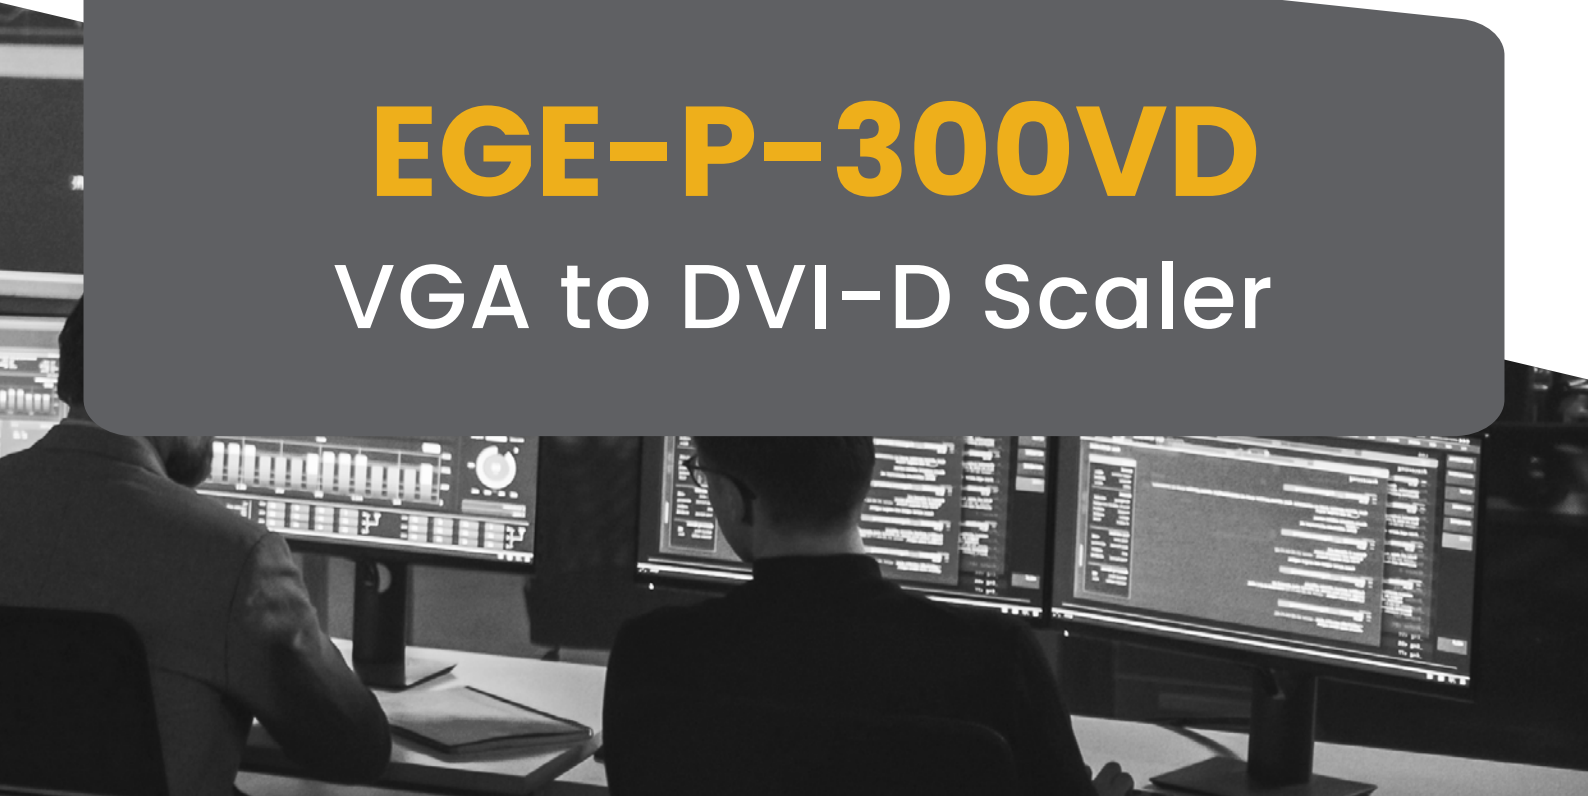

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Geratech assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Geratech assumes no responsibility for any inaccuracies that may be contained in this document. Geratech also makes no commitment to update or to keep current the information contained in this document.

Geratech reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Geratech.

© Copyright 2011 by Geratech.

All Rights Reserved.

Version 1.1 August 2011

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE DD/MM/YY	SUMMARY OF CHANGE
VR0	13/04/11	Preliminary Release
VR1	25/05/12	Add Output timings
VS1	25/01/13	Updated format/diagrams

CONTENTS

1. Introduction1

2. Applications1

3. Package Contents.....1

4. System Requirements1

5. Features1

6. Operation Controls and Functions.....2

 6.1 Top Panel.....2

 6.2 Left Panel.....3

 6.3 Right Panel3

 6.4 OSD Table4

7. Connection Diagram5

8. Specifications6

9. Acronyms6



1. INTRODUCTION

The VGA to DVI Scaler is designed to convert a VGA signal to DVI so that it can be displayed on a DVI monitor without loss of image quality. It can upscale VGA input sources to DVI output for a wide-range of PC resolutions, from VGA to WUXGA. The Scaler has a variety of output resolutions and adjustment for the best picture quality. Also, the built-in OSD function makes it easy for the user to view or select the desired resolution.

2. APPLICATIONS

- Upscale or downscale PC resolutions
- Convert an analog RGB signal into digital RGB DVI signal
- Integrate into a wider digital system

3. PACKAGE CONTENTS

- 1×VGA to DVI Scaler
- 1×5V DC Power Adaptor
- Operation Manual

4. SYSTEM REQUIREMENTS


Source equipment such as PC or laptop and output to DVI display with DVI connection cable.

5. FEATURES

- Supports PC resolution bypass from VGA to WUXGA@60 Hz (RB)
- Supports bypass, manual and TV native modes
- Supports auto-detection and hot plugging

6. OPERATION CONTROLS AND FUNCTIONS

6.1 Top Panel

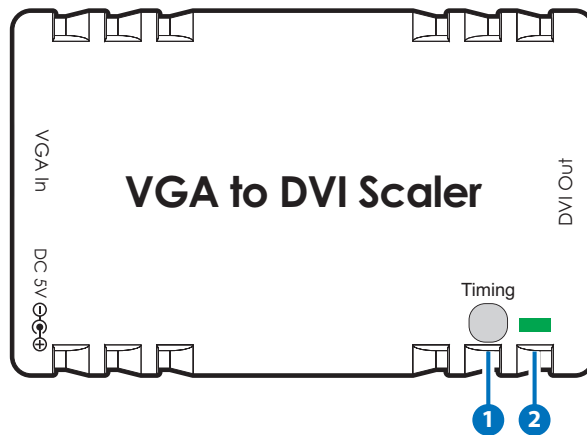


1 Timing Button

Press this button to switch the EDID setting for bypass, manual or native mode. The OSD will display both input and output resolutions on the top left of the output display. Please refer to Section 6.4 for details.

2 Power LED

This LED will illuminate in green when the unit is connected to a power supply.

6.2 Left Panel

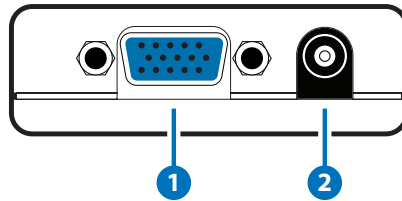


1 VGA In

Connect to a source device such as a PC or laptop with a VGA cable.

2 DC 5V

Connect the 5V DC power supply into the unit and plug the adaptor into an AC wall outlet.

6.3 Right Panel

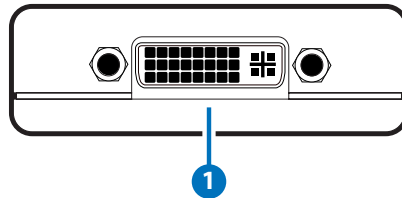

1 DVI Out

Connect to a DVI display, monitor or larger video system.


6.4 OSD Table

Input Resolution	Input Refresh Rate (Hz)	Output Refresh Rate (Hz)		
		Manual Mode	Native Mode	Bypass Mode
640x350	85	-	-	85
640x400	85	-	-	85
640x480	60, 72, 75, 85	60	60	60, 72, 75, 85
800x600	56, 60, 72, 75, 85	-	-	56, 60, 72, 75, 85
848x480	60	-	-	60
1024x768	60, 70, 75, 85	-	-	60, 70, 75, 85
1152x864	75	-	-	75
1280x720	60	60	60	60
1280x768	60, 75, 85	-	-	60, 75, 85
1280x800	60, 75, 85	60	60	60, 75, 85
1280x960	60, 85	-	-	60, 85
1280x1024	60, 75, 85	-	-	60, 75, 85
1360x768	60	60	60	60
1366x768	60	60	60	60
1400x1050	60	-	-	60
1440x900	60, 75, 85	-	-	60, 75, 85
1600x1200	60	-	-	60
1680x1050	60	-	-	60
1920x1080	60	60	60	60
1920x1200 (RB)	60	60	60	60

Note:

- 1366x768@60 & 1360x768@60 will output 1366x768@60; 1400x1050@60 & 1680x1050@60 will output 1400x1050@60.
- Both Manual & Native modes will only output an image when the input source supports a 60Hz refresh rate.
- When in Manual & Native mode's non-supported resolutions the output will automatically switch to bypass mode in order to ensure that an image is displayed.

7. CONNECTION DIAGRAM

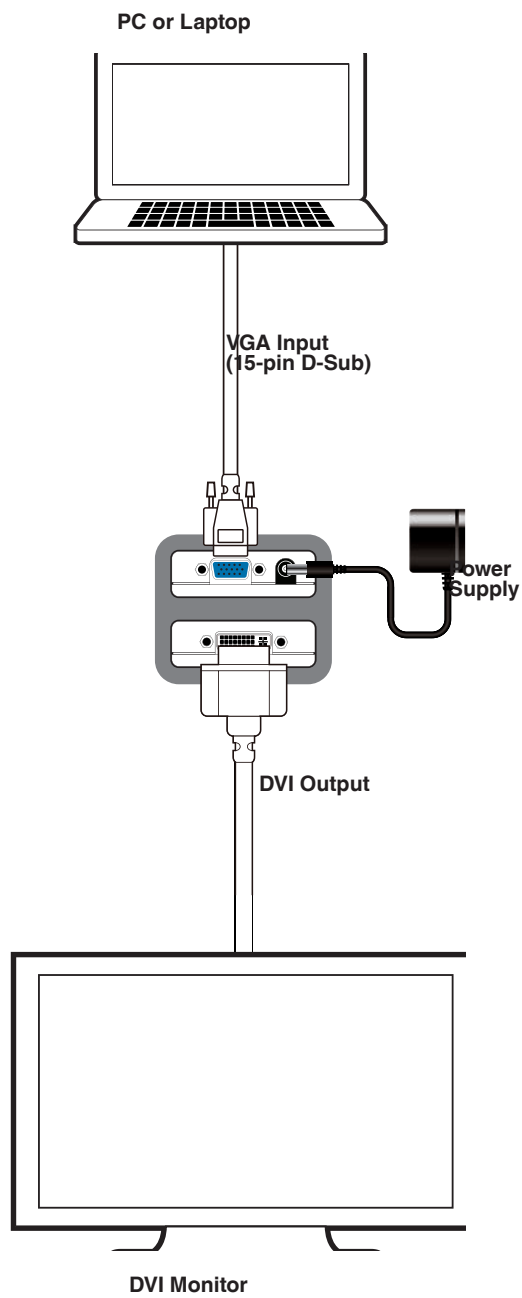

8. SPECIFICATIONS

Input Port	1×VGA
Output Port	1×DVI
Output Timings	640×480, 1280×720, 1280×800, 1366×768, 1920×1080, 1920×1200RB
Power Supply	5 V DC / 1 A linear power adaptor (US/EU standards, CE/FCC/UL certified)
ESD Protection	Human body model: ± 8kV (air-gap discharge) ± 6kV (contact discharge)
Dimensions	110 mm (W)×62 mm (D)×20 mm (H)
Weight	76 g
Chassis Material	Plastic
Silkscreen Color	Black
Operating Temperature	0 °C~40 °C/32 °F~104 °F
Storage Temperature	-20 °C~60 °C/-4 °F~140 °F
Relative Humidity	20~90 % RH (non-condensing)
Power Consumption	2.8 W

9. ACRONYMS

ACRONYM	COMPLETE TERM
DVI	Digital Visual Interface
EDID	Extended Display Identification Data
OSD	On Screen Display
VGA	Video Graphics Array



www.egerate.com

www.geratech.eu