


geratech[®]



EGE-V-401H

HDMI to CV Scaler

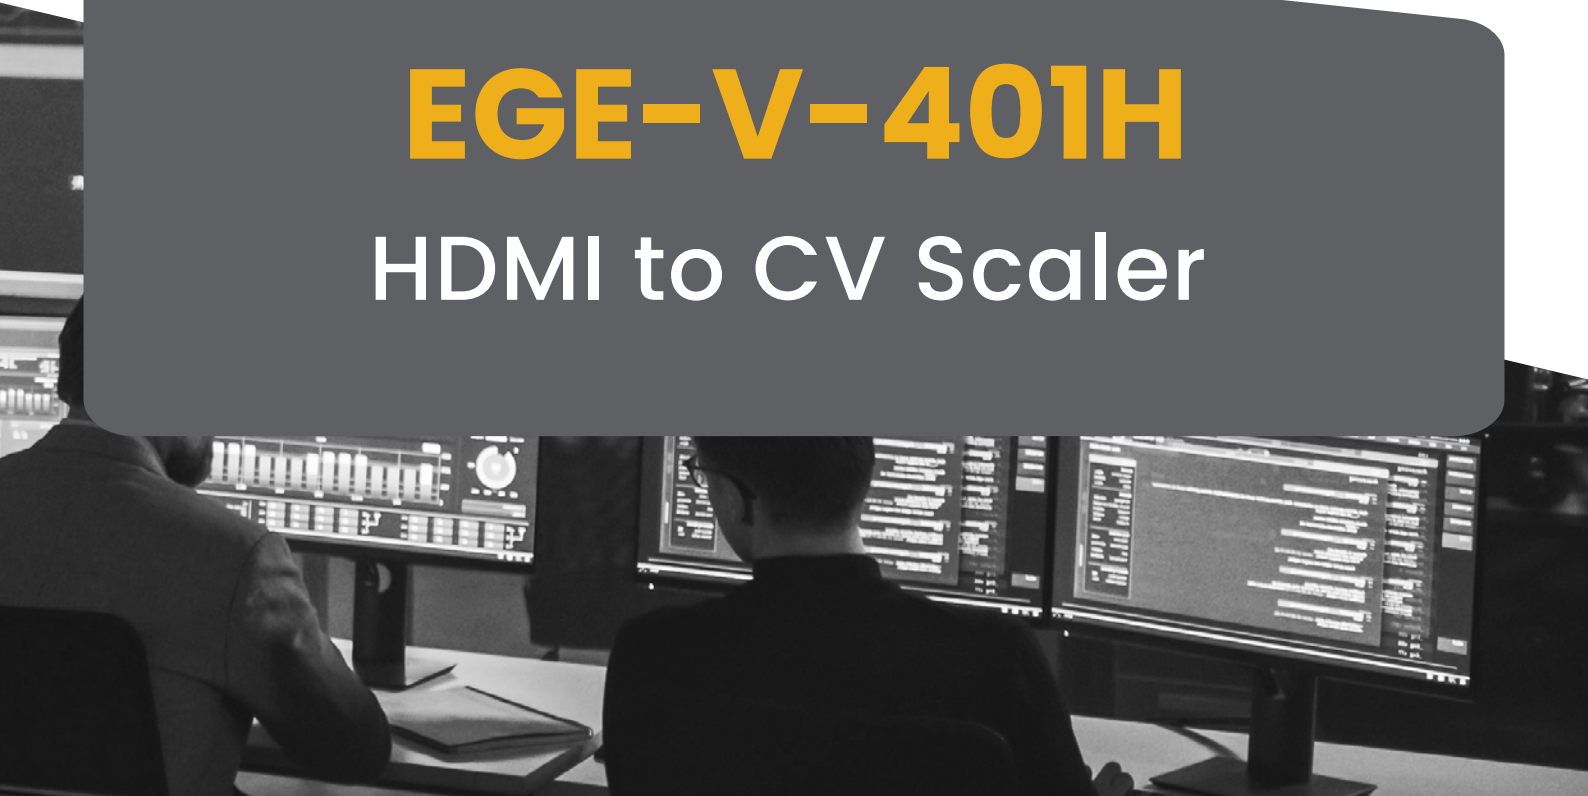

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. Geratech assumes no responsibility for any infringements of patents or other rights of third parties which may result from its use.

Geratech assumes no responsibility for any inaccuracies that may be contained in this document. Geratech also makes no commitment to update or to keep current the information contained in this document.

Geratech reserves the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means—electronic, mechanical, magnetic, optical, chemical, manual, or otherwise—without express written permission and consent from Geratech.

© Copyright 2011 by Geratech.

All Rights Reserved.

Version 1.1 August 2011

TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply.

Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

REVISION HISTORY

VERSION NO.	DATE DD/MM/YY	SUMMARY OF CHANGE
VR0	25/04/11	Preliminary Release
VS1	11/10/12	Updated format/diagrams

CONTENTS

1. Introduction	1
2. Applications	1
3. Package Contents	1
4. System Requirements	1
5. Features	2
6. Operation Controls and Functions	3
6.1 Top Panel.....	3
6.2 Left Panel	4
6.3 Right Panel.....	4
6.4 OSD Menu.....	5
6.5 Supported Input Timing	7
7. Connection Diagram	8
8. Specifications	9
9. Acronyms	9



1. INTRODUCTION

The HDMI to Video Scan Converter is designed to convert a digital signal from HDMI source to analog NTSC or PAL signal, with additional L/R stereo audio output. This device allows the user to convert high definition video to standard resolution (480i or 576i) composite (CVBS) format.

The device is HDMI and DVI compliant and has many great features such as motion adaptive 3-D de-interlacing, 3D noise reduction, frame rate conversion, adaptive contrast enhancement and more. It also has a simple on-screen display (OSD) menu that allows the user to access the display status including input/output information.

2. APPLICATIONS

- Convert HDMI video signal to NTSC or PAL signal
- Convert digital audio signal to analog audio signal

3. PACKAGE CONTENTS

- HDMI to Video Scan Converter
- 5 V/1 A DC Power Adaptor
- Operation Manual

4. SYSTEM REQUIREMENTS

Input source equipment such as a digital camera or PC with HDMI output port and output display (TV or monitor) with Composite Video and L/R audio input ports, HDMI cables and RCA cables..


5. FEATURES

- HDMI and DVI 1.0 compliant
- Converts an HDMI video signal to NTSC/PAL
- Converts HDMI digital audio to analog stereo audio
- Accepts a wide range of input resolutions of 480i to 1080p (HDTV) and VGA to WUXGA@60 Hz (PC)
- Output picture can be set to 'Underscan' or 'Overscan'
- Motion adaptive 3-D de-interlacing with pixel-by-pixel motion adaptive interpolation
- 3D noise reduction in both temporal and spatial domain
- Frame rate conversion with a arbitrary conversion ratio
- Adaptive contrast enhancement

Note: The converter does NOT support HDCP. If any HDCP-encrypted content is played, there will no any video output.


6. OPERATION CONTROLS AND FUNCTIONS

6.1 Top Panel

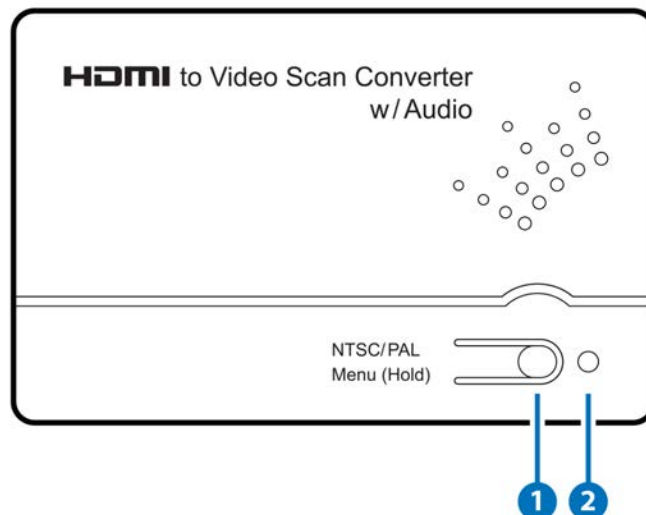


- 1 NTSC/PAL MENU (Hold):** Press this button to bring up the On-Screen Display (OSD) which will display the input timing and the output TV format information. When the OSD is displayed, press the button again to switch the output TV system from NTSC to PAL or from PAL to NTSC. Press and hold this button for 3 seconds the OSD will bring up the selection menu. Press it sequentially to select the required setting.
- 2 POWER LED:** This LED will illuminate in RED when the unit is connected to the power supply.

6.2 Left Panel

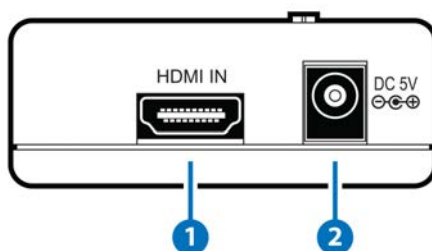

- 1 **HDMI IN:** Connect the HDMI IN port to the HDMI output port of your source equipment such as a DVD player or Set-top box. You can also use an HDMI to DVI cable to connect to the DVI output of your PC.
- 2 **DC 5V:** Plug the 5 V DC power supply into the unit and connect the adaptor to AC wall outlet.

6.3 Right Panel

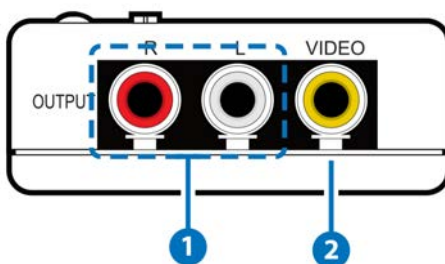

- 1 **OUTPUT L/R:** Connect the L/R stereo output ports to the input ports of active speakers or TV/monitor with corresponding audio inputs.
- 2 **OUTPUT VIDEO:** Connect the VIDEO output port to the composite video input port of your display such as HDTV or monitor.

6.4 OSD Menu

IN	1280x960 @60 (Input Timing)	Press the Menu button once to bring up the OSD and display the input (IN) and Output (OUT) information.
OUT	NTSC (Output TV System)	
NTSC		Press and hold the MENU button for 3 seconds to bring up the OSD then press it repeatedly to move the OSD cursor to the desired selection. Once the selection is made, if the MENU button is not pressed for a few seconds, the OSD will disappear and the display will output following the selected parameters.
PAL		
Underscan 1		
Underscan 2		
Overscan		
Aspect Adj.	Full Screen	
	Lette (RB)ox	
	Pan & Scan	
	Auto TV 4:3	
	Auto TV 16:9	

Below is the example of the scan selection result.

Source	TV	Underscan1	Underscan2	Overscan

Aspect Adjustment: There are total of 5 different aspect ratio adjustments: Full Screen, Lette (RB)ox, Pan & Scan and Auto TV 4:3 & Auto TV 16:9.

Full Screen: To allow the image to fill the screen of the TV.

















Lette (RB) ox: To fit a 16:9 formatted video signal on a 4:3 display. Horizontal Black bars will be displayed above and below the image

Pan & Scan: To fit a 4:3 formatted video signal on a 16:9 display. Vertical black bars will be displayed at both sides of the the image.

Auto TV 4:3: The device will detect the input source aspect ratio of 4:3 or 16:9 and make the automatically make the adjustment to 4:3.

Auto TV 16:9: The device will detect the input source aspect ratio of 16:9 or 4:3 and automatically make the adjustment to 16:9.

Blow is the sample chart of the selection result:

Source TV	Aspect Adjust	Full Screen	Lette (RB) ox	Pan&Scan	Auto TV 4:3	Auto TV 16:9
				×		×
			×		×	
				×		×
			×	×	×	


6.5 Supported Input Timing

HD Timing	480i	60
	480p	60
	576i	50
	576p	50
	720p	50/60
	1080i	50/60
	1080p	50/60
PC Timing	640×480	60/72/75/85
	720×400	70
	800×600	56/60/72/75/85
	1024×768	60/70/75/85
	1152×864	70/75/85
	1280×720	60
	1280×768	60/60 (RB)
	1280×800	60/60 (RB)
	1280×960	60
	1280×1024	60
	1366×768	60/60 (RB)
	1440×900	60/60 (RB)
	1600×1200	60/60 (RB)
	1680×1050	60
	1920×1080	60/60 (RB)
1920×1200	60 (RB)	

Note:

1. If the input resolution is not supported, the OSD will show 'IN Not Support'.

7. CONNECTION DIAGRAM

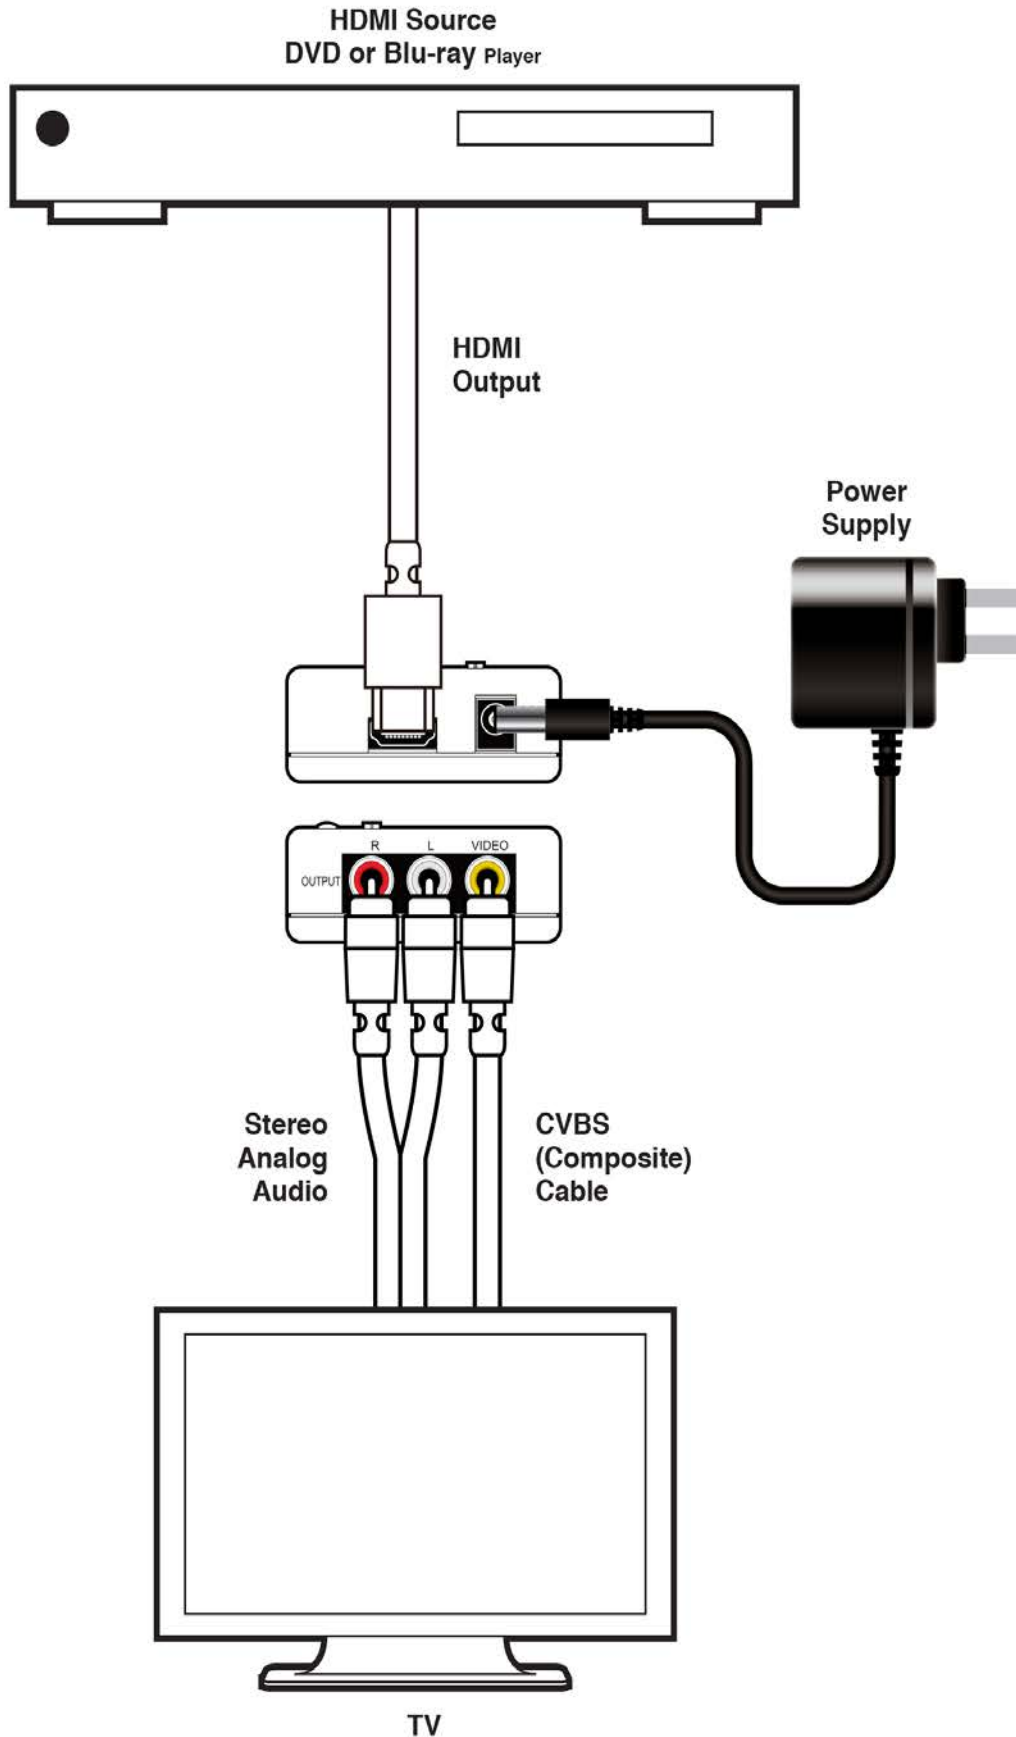

8. SPECIFICATIONS

Input Port	1xHDMI
Output Port	1xCVBS (Composite Video) 1xL/R Stereo RCA Jacks (Analog Audio)
HDMI Input Audio	LPCM 2CH, 48 kHz
Output Video	NTSC/PAL
Output Audio	Stereo L/R
ESD Protection	Human body model: ±8 kV (air-gap discharge) ±6 kV (contact discharge)
Power Supply	5 V DC/1 A linear power adaptor (US/EU standards, CE/FCC/UL certified)
Dimensions	114 mm (W)×65 mm (D)×26 mm (H)
Weight	120 g
Chassis Material	Plastic
Silkscreen Color	White
Operating Temperature	0 °C~40 °C/32 °F~104 °F
Storage Temperature	-20 °C~60 °C/-4 °F~140 °F
Power Consumption	4.7 W
Relative Humidity	20~90 % RH (non-condensing)

9. ACRONYMS

ACRONYM	COMPLETE TERM
CVBS	Composite Video (Color, Video, Blanking, and Sync)
HDMI	High-Definition Multimedia Interface
LPCM	Linear Pulse-Code Modulation
NTSC	National Television System Committee
PAL	Phase Alternating Line



www.egerate.com

www.geratech.eu