

geratech®



**EGE-CNV-SDIHD**

MINI 3G SDI to HDMI  
Converter





**TABLE OF CONTENTS**

<b>1. Introduction.....</b>	<b>1</b>
<b>2. Features.....</b>	<b>1</b>
<b>3. Package .....</b>	<b>1</b>
<b>4. Specifications .....</b>	<b>1</b>
<b>5. Operation controls and Fuctions .....</b>	<b>2</b>
<b>6. Application Example .....</b>	<b>2</b>



Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

## 1. Introduction

The MINI SDI to HDMI converter allows SD-SDI, HD-SDI and 3G-SDI signals to be shown on HDMI displays while ensuring high bit rates of 2.970 Gbit/s to give you fast signal transmission without any loss. For professionals this means that it is now easier to distribute and extend your 3G SDI signal while giving you the ability to display your work on HDMI displays thanks to the built in HDMI converter.

## 2. Features

- Operation at 2.970Gbit/s, 1.485Gbit/s and 270Mbits/s
- Supports SMPTE 425M, SMPTE 424M, SMPTE 292M, SMPTE 259M-C
- Conversion from SMPTE 425M level B to Level A 1080p 50/59.94/60 4:2:2 10-bit
- Connect with other units to extend your signal over long distances

## 3. Package

- 3G SDI to HDMI Converter
- 5V DC Power Supply Adaptor
- Operation Manual

## 4. Specifications

Input Port : 1 x BNC (SDI/HD-SDI/3G-SDI)

Output Port : 1 x HDMI

SDI Transmission Rates : 2.970 Gbit/s and 2.970/1.001 Gbit/s

In/Output Resolution : 480i, 576i, 720p@50/59.94,60 ,1080i@50/59.94/60  
1080p@23.97/24/25/29.97/30/50/59.94/60

Power Supply : DC 5V -12V

ESD Protection Human body model :  $\pm 8$ kV (air-gap discharge) ,  
 $\pm 4$ kV (contact discharge)

Dimension : 80mm x 41mm x 25 mm

Weight : 150g


Operating Temperature : 0°C ~ 40°C / 32°F ~ 104°F

Storage Temperature : -20°C ~ 60°C / -4°F ~ 140°F

Relative Humidity : 20 ~ 90% RH (Non-condensing)


Power Consumption (Max) : 5W

## 5. Operation controls and Functions

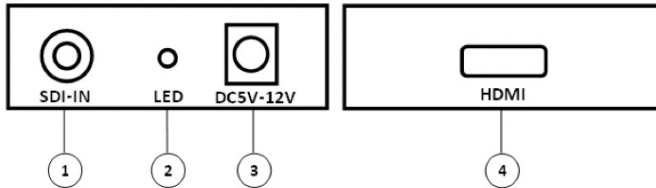

- ① **SDI IN:** This slot is where you connect the SDI source output .
- ② **POWER LED:** This red LED illuminate when the device is connected with power supply.
- ③ **HDMI OUT:** This slot is where you connect the HDMI display with HDMI cable.
- ④ **DC IN:** Plug the 5V-12V DC power supply into the unit.

## 6. Application Example

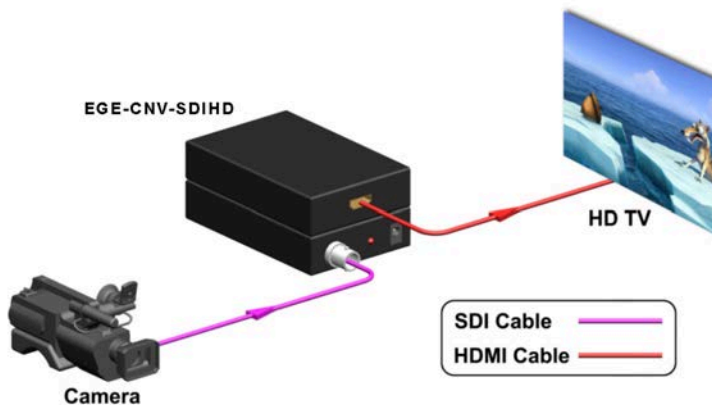





[www.egerate.com](http://www.egerate.com)

[www.geratech.eu](http://www.geratech.eu)

EDE