

geratech[®]



EGE-CVSD-3A

1×3 sv/cv splitter

CONTENTS

1. This package includes

2. Features.....

3. Connection and Installation

4. Specifications

1

1

2

3



The EGE-CVSD-3A is the combination of a 1x3 CV and 1x3 SV Distribution amplifier with stereo. It accepts one CV and one SV input at the same time and delivers 3 buffered and isolated outputs for each of the CV and SV input. When the CV and SV come from the same source, the EGE-CVSD-3A becomes a 1-in 6-out distributor.

1. This package includes


- One EGE-CVSD-3A
- One user manual
- One set of S video cable
- One set of 1 R to 1R video cable
- One set of 2R to 2 R audio cable

2. Features


- The input can be composite video or S video. It can connect up to 3 displays for input either.
- High bandwidth : 10MHz (-3dB) - LED power indicator
- Worldwide power supply.

3. Connection and Installation:

1 Works as a 1-in 3-out distribution amplifier for S-Video source

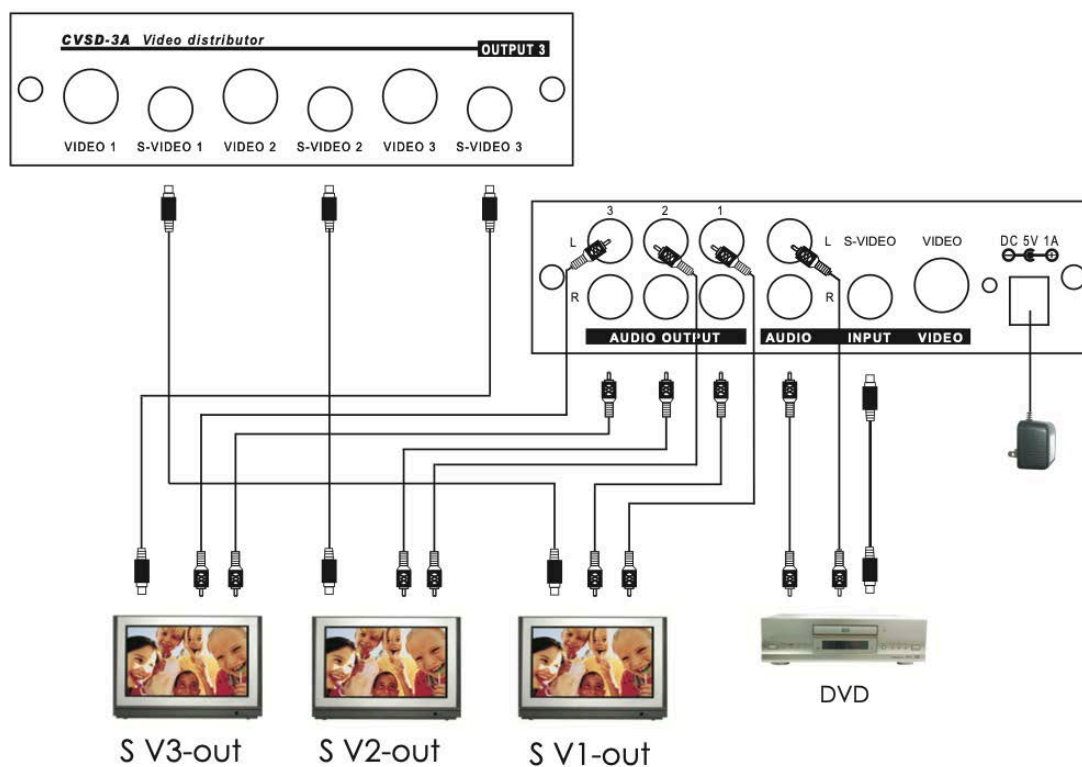

3.2. Works as a 1-in 3-out distribution amplifier for Video source

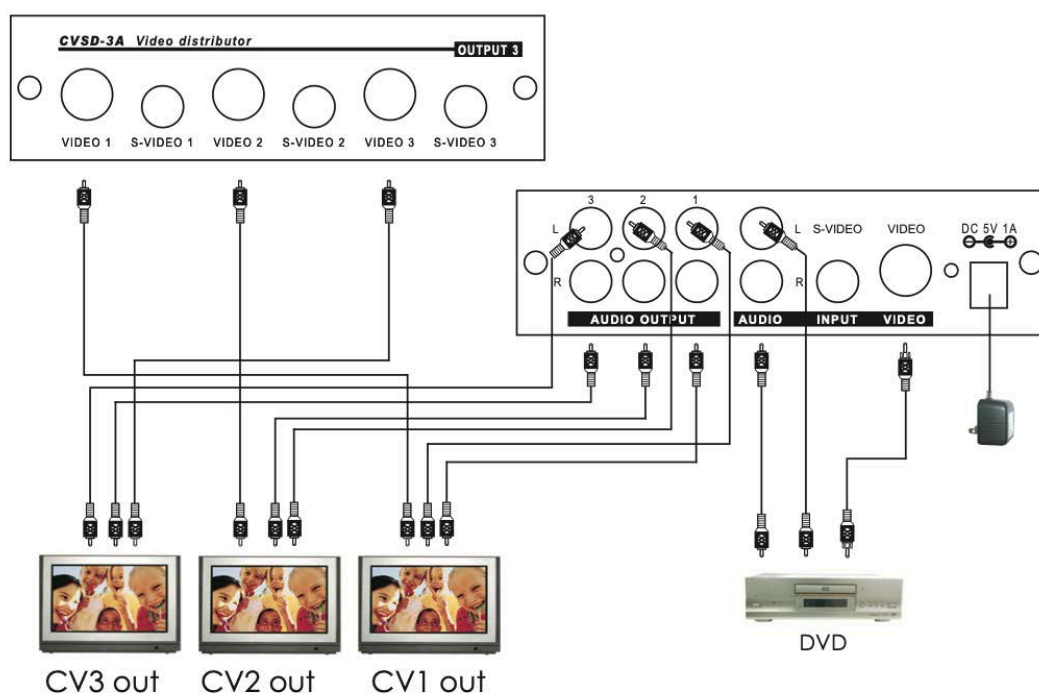

4. Specifications

Video Input x 1	1Vp-p 75 ohm
S-Vido Input x 1	Y 1Vp-p 75 ohm C 0.7Vp-p 75 ohm
Video Output x 3	1Vp-p 75 ohm x 3
S-Video Output x 3	Y 1Vp-p 75 ohm C 0.7Vp-p 75 ohm
Audio Input x 1	2Vrms max 47K ohm
Audio Output x 3	2Vrms max 47K ohm
Bandwidth	10MHZ (-3db)
Differential gain	0.05%
Differential phase	0.05 degree
Power	5V 1~2A
Dimension (WxHxD)	141 * 38 * 105mm



www.egerate.com

www.geratech.eu