



AccuFit Series

The finest flush-mount speakers in the world are useless if they cannot be installed due to restrictions in a building's walls or ceiling. To solve some of these problematic situations SpeakerCraft has modified models in our classic MT, DT and CRS series to include shallow enclosures designed for space-restricted installations. These are more than just a metal cabinet attached to the baffle. Great care has been taken to re-voice the speakers themselves so their performance is optimized in the limited air space available. Now there is a speaker for those situations that made it impossible in the past.

AccuFit CRS7 Three



- 7" Aluminum Cone Woofer
- .75" Pivoting Aluminum Dome Tweeter
- Front-Mounted Treble Switch
- Sealed Steel Enclosure
- Timbre-Matched to All Three Series Speakers
- Sensitivity: 92 dB 1W/1M
- Power Handling: 125 Watts
- Impedance: 8 Ohms
- Frequency Response: 50Hz - 20kHz
- STL (Sound Transmission Loss) Feature:
 - STL @ A-weighted sound reduction: 27dBA
 - Measuring signal: Pink Noise
- Dimensions (Dia x D): 9⁵/₈" x 2³/₄"
mm = (251 x 70)
- Cut-Out Diameter: 8¹/₄" (210mm)
- Patent Pending

AccuFit DT7 Three



- 7" Aluminum Cone Woofer
- (2) .75" Aluminum Dome Tweeters
- Sealed Steel Enclosure
- Front-Mounted Treble Switch
- Timbre-Matched to All Three Series Speakers
- Sensitivity: 92 dB 1W/1M
- Power Handling: 100 Watts
- Impedance: 8 Ohms
- Frequency Response: 50Hz - 20kHz
- STL (Sound Transmission Loss) Feature:
 - STL @ A-weighted sound reduction: 27dBA
 - Measuring signal: Pink Noise
- Dimensions (Dia x D): 9⁵/₈" x 2³/₄"
mm = (251 x 70)
- Cut-Out Diameter: 8¹/₄" (210mm)
- Patent Pending

AccuFit CRS7 One



- 7" Polypropylene Cone Woofer
- .75" Rein Coated Silk Dome Tweeter
- Sealed Steel Enclosure
- Timbre-Matched to All One Series Speakers
- Sensitivity: 92 dB 1W/1M
- Power Handling: 100 Watts
- Impedance: 8 Ohms
- Frequency Response: 50Hz - 20kHz
- STL (Sound Transmission Loss) Feature:
 - STL @ A-weighted sound reduction: 27dBA
 - Measuring signal: Pink Noise
- Dimensions (Dia x D): 9⁵/₈" x 2³/₄"
mm = (251 x 70)
- Cut-Out Diameter: 8¹/₄" (210mm)
- Patent Pending


AccuFit DT7 One



- 7" Polypropylene Cone Woofer
- (2) .75" Rein Coated Silk Dome Tweeters
- Sealed Steel Enclosure
- Timbre-Matched to All One Series Speakers
- Sensitivity: 91 dB 1W/1M
- Power Handling: 100 Watts
- Impedance: 8 Ohms
- Frequency Response: 50Hz - 20kHz
- STL (Sound Transmission Loss) Feature:
 - STL @ A-weighted sound reduction: 27dBA
 - Measuring signal: Pink Noise
- Dimensions (Dia x D): 9⁵/₈" x 2³/₄"
mm = (251 x 70)
- Cut-Out Diameter: 8¹/₄" (210mm)
- Patent Pending



Our speakers sound much better off-axis!

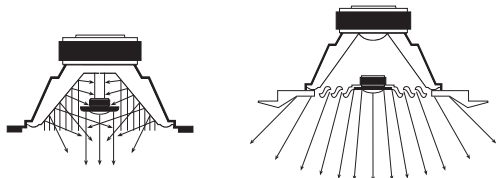

Only SpeakerCraft offers the exclusive WavePlane™ tweeter baffle which is located just behind the tweeter of all AIM in-ceiling speakers. The WavePlane™ creates better high frequency dispersion. This is accomplished by allowing the tweeter to reflect off a solid surface instead of the vibrating woofer. Ordinary speakers only sound their best when you are directly underneath them. This is because high frequencies are directional. The WavePlane™ assures optimal high frequency dispersion throughout the listening area.

* All Enclosed Speakers come with Limited LIFETIME Warranty

* As we incorporate design improvements, specifications may change without notice



940 Columbia Ave., Riverside CA 92507 • USA (800) 448 0976 Fax (951) 787 8747 International +1 951 787 0543 • www.speakercraft.com