

ez-Pro VS10

10 Input 1080p60
Customizable Video Switcher

Touch Screen
(Multiview/PGM selectable) 2 x PIP Joystick



4 x SDI AUX
(Source assignable)

Low Noise Fan

Fill&Key
(DSK)

Customize Your Switcher!


with VS10 Utility software available  

Labeling



Label input source names
as your want!

Multiview Layout

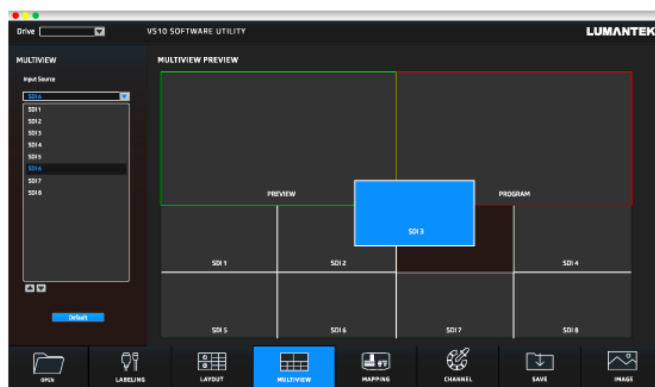

Choose different multiview layouts
and assign sources as you want!

Button Mapping



Assign video sources to console
button of your preference.

Internal Scalers (SD to 1080p60) in ALL INPUTS!



4 x AUX
2 x PGM

Genlock

PTZ

Internal scalers in all input
2 x HDMI, 8 x 3G-SDI Input

External Analog Audio
Input & Output

Make your switcher!

Connections

- * 3G/HD/SD-SDI Input : BNC 75Ω 8ea (with Scaler)
- * HDMI Input : 2ea (with Scaler)
- * 3G/HD/SD-SDI Output : BNC 75Ω 6ea (AUX1/AUX2/AUX3/AUX4/PGMx2)
- * HDMI Output : 2ea (PGM/MULTIVIEW)
- * Remote : 1ea
- * Reference Input : 1ea
- * USB2.0 : 1ea
- * External Analog Audio Input : XLR 2ea
- * External Analog Audio Output : XLR 2ea
- * DC 12V : 1ea

Video Format Support

- * 480i59/576i50 (Input only for SD resolution)
- 1080p30/1080p29/1080p25/1080p24/1080p23
- 1080i60/1080i59/1080i50/
- 720p60/720p59/720p50
- 1080p60/1080p59/1080p50

Video Switcher

- * Mix & Effect : 1ea
- * PIP : 2ea
- * KEY : 1ea(LUMA/CHROMA)
- * Downstream Keyer : 1ea(FILL/KEY)
- * Pattern Generator : 2ea(Color Bar/Color BG)
- * Media : 2ea
- * Multiview : 8view/13view/16view 1ea
- * Audio Mixer : 10 stereo input mixer 1ea

Management

TFT-LCD (4.98inch, Capacitive Touch Screen)

Physical

- * Dimension : 89(H)X400(W)X294(D) (mm, Excluding Connector)
- * Weight : 3.7kg (8.15lbs)

Environmental

Operating Temperature : 0 ~ 45°C

Power Requirement

- * Power Input : DC 12V
- * Power Consumption : 40W(max)